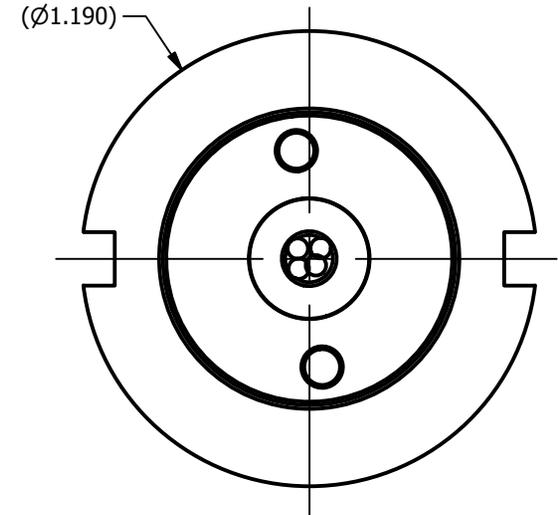
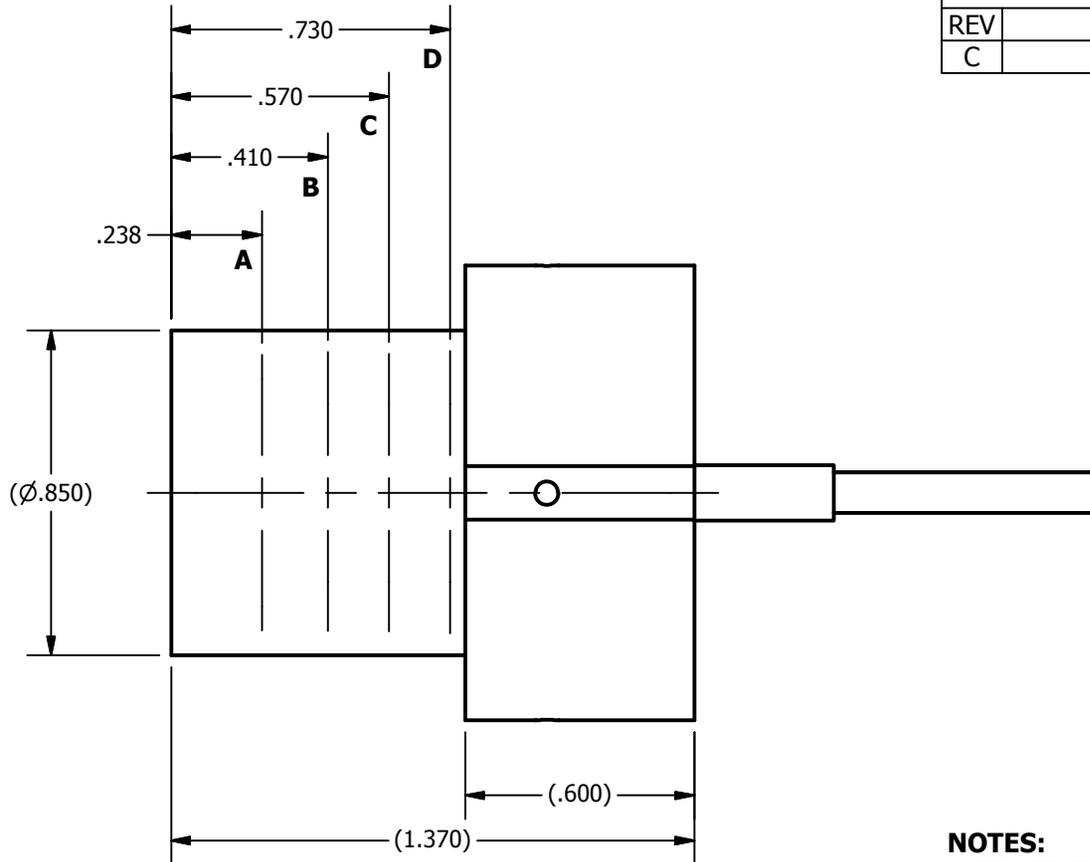


2

1

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
C	Parts Update	03/18/2011	

**NOTES:**

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 4 AMPS MAX
VOLTAGE: 500 VDC
- CONTACTS ARE GOLD PLATED
- WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.
- MOUNTING DETAIL TO BE DETERMINED BY CUSTOMER.
- PART NUMBER TO ORDER: 915-0200-01 CURRENT REV.

CONTACT	WIRE SIZE	COLOR	LENGTH
A	24 AWG	ORANGE	24"
B	24 AWG	BROWN	24"
C	24 AWG	BLACK	24"
D	24 AWG	RED	24"

WIRING DIAGRAM

DRAWN S. GIBSON	3/17/2011
CHECKED	
APPROVED	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: ANGULAR: $\pm .50^\circ$ TWO PLACE DECIMAL $\pm .015$ THREE PLACE DECIMAL $\pm .005$ FOUR PLACE DECIMAL $\pm .0005$ FILLET: R.032 MAX REMOVE ALL BURRS AND BREAK SHARP EDGES .015 MAX	



TITLE

4-CONDUCTOR FEMALE IN-LINE CONCENTRIC STAB ASSEMBLY

SIZE	MATERIAL	DWG NO	REV
A	SEE 915-0200-01	915-0200-01-SALES	C

All rights reserved. This document and the information contained herein are the sole property of Canyon Manufacturing Inc. Any reproduction or distribution in whole or in part without written permission of Canyon Manufacturing Inc. is prohibited.

SHEET 1 OF 1

2

1